


RFSTB

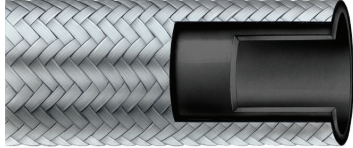

*Smoothbore Black Conductive PTFE Lined
Hose with Braided Stainless Steel Cover*

TUBE: Black conductive PTFE

COVER: Braided stainless steel

TEMPERATURE: -20°F to 350°F

Part Number	Hose ID Inch	Hose OD Inch	Bend Radius Inch	Max. Working Pressure @ 70°F psig	Vacuum Rating @ 70°F in. Hg.	Weight Per Foot
04RFSTB	0.25	0.37	3.00	3000	FULL	0.08
06RFSTB	0.38	0.51	5.00	2000	FULL	0.11
08RFSTB	0.50	0.63	6.50	1425	FULL	0.16
12RFSTB	0.75	0.88	8.20	1000	FULL	0.20
16RFSTB	1.00	1.19	12.00	1000	FULL	0.50
24RFSTB	1.50	1.76	20.00	1000	FULL	0.92

Features

- Conductive liner dissipates static electricity
- Outer cover is stainless steel braid overwrap
- Smoothbore PTFE inner core
- Non-stick contact surface will not contaminate product
- Withstands high velocity and pressure surges
- Resists moisture
- Autoclavable

Applications

- Food processing
- Pharmaceutical processing
- Cosmetics
- Hot CIP solutions
- Chemical products
- Low pressure steam

Hose Certifications

- FDA 21 CFR 177.1550
- USDA